

Description

The DFI200HF17DFRE1 is a Half Bridge IGBT Power Module. It integrates high performance IGBT chips and offers lower losses and higher energy for the applications such as motor drive, inverter and welding machines.



Features

- 1700V200A
- $V_{CE(sat)}(typ.) = 1.65V@25^{\circ}C$
- Lower losses and higher energy
- High speed switching

Applications

- Motor drive
- Inverter
- Welding machines
- Power supply
- UPS

Circuit diagram

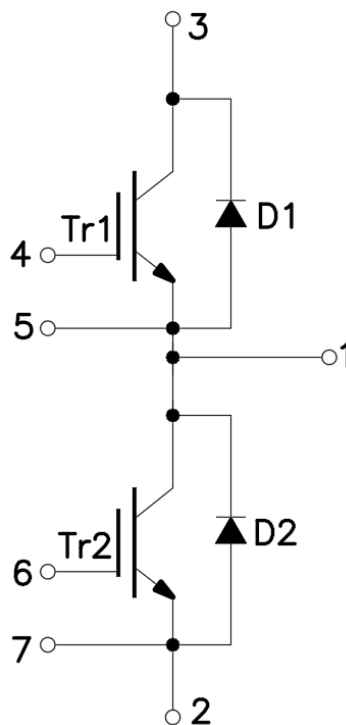


Figure 1. Out drawing & circuit diagram for DFI200HF17DFRE1

Pin Configuration and Marking Information

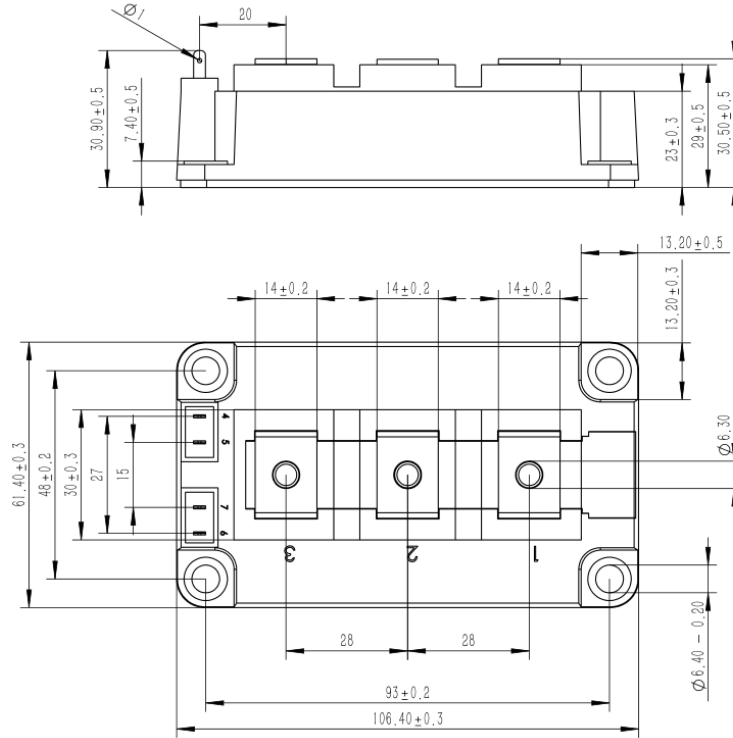


Figure 2. Pin configuration

Module

| Parameter | Condition | Value | Unit |
|--|----------------------|--------|------|
| Isolation Voltage | RMS, f=50Hz, t=1min | 4.0 | kV |
| Material of module baseplate | - | Cu | - |
| Creepage distance | terminal to heatsink | 47 | mm |
| | terminal to terminal | 26 | |
| Clearance | terminal to heatsink | 29 | mm |
| | terminal to terminal | 14 | |
| CTI | - | >200 | - |
| Module lead resistance, terminals – chip | T _c =25°C | 0.8 | mΩ |
| Mounting torque for module mounting | M6 | 3 to 6 | Nm |
| Weight | - | 315 | g |

Maximum Ratings (T_j=25°C unless otherwise specified)

| Symbol | Parameter | Conditions | Ratings | Unit |
|------------------|---------------------------------|----------------------------|------------|------|
| V _{CES} | Collector-Emitter Voltage | G-E Short | 1700 | V |
| V _{GES} | Gate-Emitter Voltage | C-E Short | ±20 | V |
| I _C | DC Continuous Collector Current | T _C =125°C | 200 | A |
| I _{CM} | Pulse Collector Current | t _p =1ms, Note1 | 400 | A |
| P _C | Maximum Power Dissipation | T _C =25°C, IGBT | 1364 | W |
| I _F | Diode Forward Current | - | 200 | A |
| I _{FRM} | Repetitive peak forward Current | t _p =1ms, Note1 | 400 | A |
| T _j | junction temperature | - | -40 to 175 | °C |
| T _{stg} | Storage temperature | - | -40 to 125 | °C |

Note1: Pulse width limited by maximum junction temperature

NTC characteristics

| Symbol | Parameter | Condition | Value | | | Unit |
|---------------------|-------------------------------|--|-------|------|------|------|
| | | | Min. | Typ. | Max. | |
| R ₂₅ | Resistance | T _C =25°C | - | 5 | - | kΩ |
| ΔR/R | Deviation of R ₁₀₀ | T _C =100°C, R ₁₀₀ =493Ω | -5 | - | 5 | % |
| P ₂₅ | Power dissipation | T _C =25°C | - | - | 20 | mW |
| B _{25/50} | B-value | R ₂ = R ₂₅ exp [B _{25/50} (1/T ₂ - 1/(298,15 K))] | - | 3375 | - | K |
| B _{25/80} | B-value | R ₂ = R ₂₅ exp [B _{25/80} (1/T ₂ - 1/(298,15 K))] | - | 3411 | - | K |
| B _{25/100} | B-value | R ₂ = R ₂₅ exp [B _{25/100} (1/T ₂ - 1/(298,15 K))] | - | 3433 | - | K |

IGBT Electrical characteristics (T_j=25°C unless otherwise specified, chip)

| Symbol | Item | Condition | | Value | | | Unit | |
|----------------------|--|--|----------------------|-----------------------|-------|------|-------|----|
| | | | | Min. | Typ. | Max. | | |
| V _{CE(sat)} | Collector-Emitter Saturation Voltage | I _C =200A | V _{GE} =15V | T _j =25°C | - | 1.65 | 1.90 | V |
| | | | | T _j =125°C | - | 1.75 | - | V |
| | | | | T _j =150°C | - | 1.85 | - | V |
| | | | | T _j =175°C | - | 1.90 | - | V |
| V _{GE(th)} | Gate-Emitter threshold Voltage | I _C =8mA, V _{CE} =V _{GE} | | 5.0 | - | 6.5 | V | |
| Q _G | Gate charge | V _{GE} = -15V to +15V, V _{CC} =900V | | - | 2.1 | - | uC | |
| R _{Gint} | Internal gate resistor | - | T _j =25°C | - | - | - | Ω | |
| C _{ies} | Input Capacitance | V _{CE} =25V, | | T _j =25°C | - | 16.5 | - | nF |
| C _{oes} | Output Capacitance | V _{GE} =0V | | | - | 0.67 | - | nF |
| C _{res} | Reverse transfer Capacitance | f =1MHz | | | - | 0.25 | - | nF |
| I _{CES} | Collector- Emitter Cut off Current | V _{CE} =1700V, V _{GE} =0V | | T _j =25°C | - | - | 1 | mA |
| I _{GES} | Gate-Emitter Leakage Current | V _{GE} =20V, V _{CE} =0V | | T _j =25°C | - | - | 1 | uA |
| t _{d(on)} | Turn-on delay time | V _{CC} =900V I _C =200A V _{GE} =+15V/-8V R _{Gon} = R _{Goff} =3.0Ω Inductive load | | T _j =25°C | - | 204 | - | ns |
| | | | | T _j =150°C | - | 208 | - | ns |
| t _r | Rise time | | | T _j =25°C | - | 126 | - | ns |
| | | | | T _j =150°C | - | 191 | - | ns |
| t _{d(off)} | Turn-off delay time | | | T _j =25°C | - | 568 | - | ns |
| | | | | T _j =150°C | - | 731 | - | ns |
| t _f | Fall time | | | T _j =25°C | - | 370 | - | ns |
| | | | | T _j =150°C | - | 679 | - | ns |
| E _{on} | Turn-on power dissipation | T _j =25°C | - | 78.3 | - | mJ | | |
| | | T _j =150°C | - | 127.5 | - | mJ | | |
| E _{off} | Turn-off power dissipation | T _j =25°C | - | 44.8 | - | mJ | | |
| | | T _j =150°C | - | 68.1 | - | mJ | | |
| R _{th(j-c)} | Thermal Resistance, Junction to Case (IGBT) | | | - | 0.11 | - | °C /W | |
| R _{th(c-s)} | Thermal Resistance, Case to sink (Conductive Grease applied) , Note1 | | | - | 0.030 | - | °C /W | |

Note1: Assumes Thermal Conductivity of grease is 2.8 W/m · K and thickness is 50um.

Freewheeling Diode Electrical characteristics (T_j=25°C unless otherwise specified, chip)

| Symbol | Item | Condition | Value | | | Unit | |
|----------------------|---|--|------------------------|-------|------|------|----|
| | | | Min. | Typ. | Max. | | |
| V _F | Diode Forward Voltage | I _F = 200A, V _{GE} = 0V | T _j = 25°C | - | 1.80 | 2.1 | V |
| | | | T _j = 125°C | - | 1.75 | - | V |
| | | | T _j = 150°C | - | 1.75 | - | V |
| | | | T _j = 175°C | - | 1.72 | - | V |
| t _{rr} | Reverse recovery time | (Switch side) V _{CC} = 900V, I _C = 200A | T _j = 25°C | - | 1073 | - | ns |
| | | | T _j = 150°C | - | 1504 | - | ns |
| I _{RM} | Peak reverse recovery Current | V _{GE} = +15V/-8V, R _G = 3.0Ω (FRD side) | T _j = 25°C | - | 91 | - | A |
| | | | T _j = 150°C | - | 110 | - | A |
| Q _{rr} | Recovered charge | V _{rr} = 900V, I _F = 200A V _{GE} = -8V | T _j = 25°C | - | 38 | - | uC |
| | | | T _j = 150°C | - | 81 | - | uC |
| E _{rr} | Reverse recovered energy | Inductive load switching operation | T _j = 25°C | - | 17.5 | - | mJ |
| | | | T _j = 150°C | - | 41.7 | - | mJ |
| R _{th(j-c)} | Thermal Resistance, Junction to Case (Diode) | | - | 0.18 | - | °C/W | |
| R _{th(c-s)} | Thermal Resistance, Case to sink (Conductive Grease applied), Note1 | | - | 0.040 | - | °C/W | |

Note1: Assumes Thermal Conductivity of grease is 2.8 W/m · K and thickness is 50um.

Test Conditions

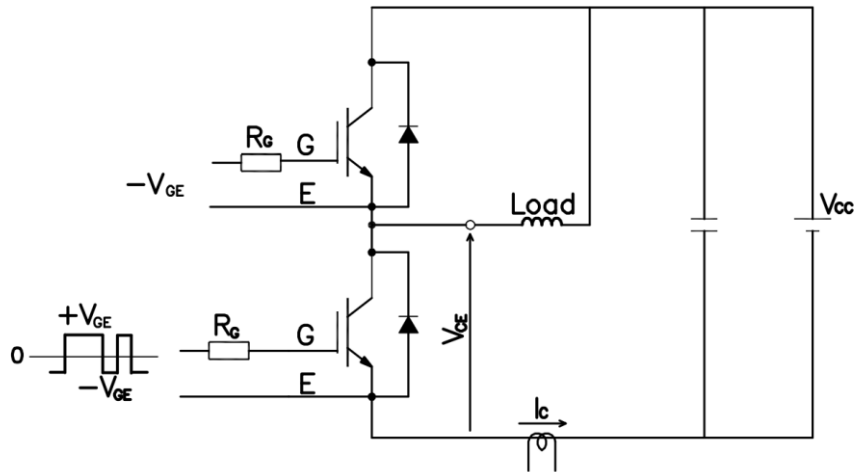


Figure 3. Switching time measure circuit

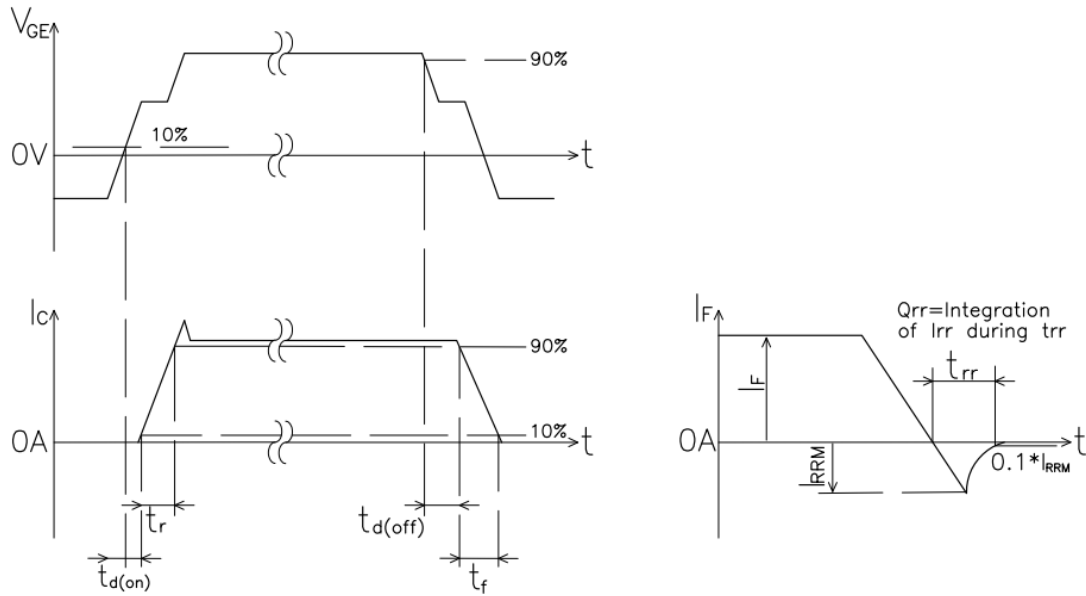
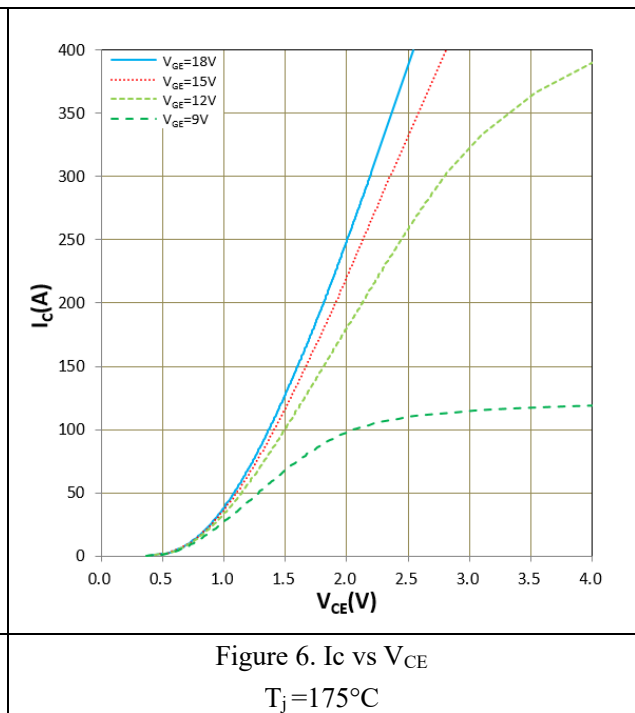
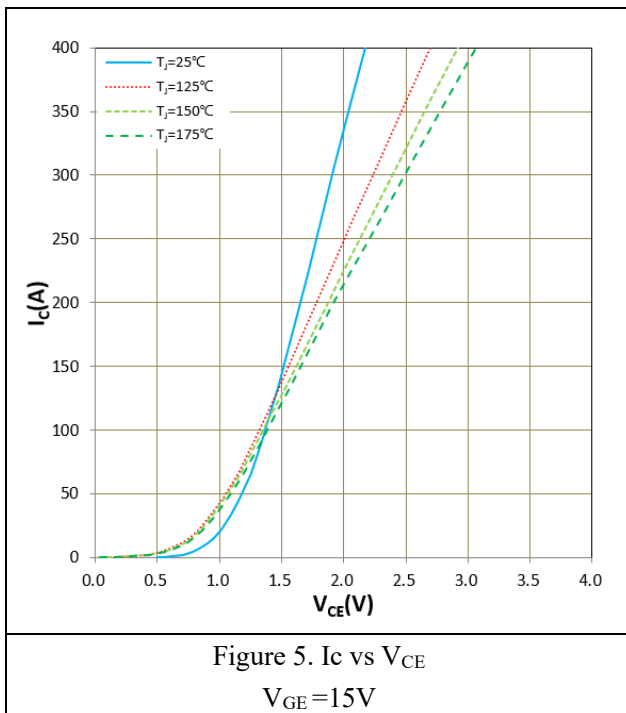


Figure 4. Switching time definition



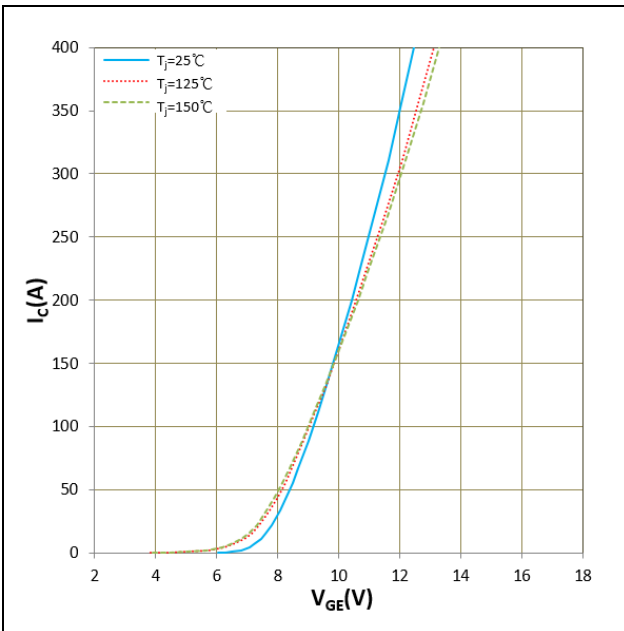


Figure 7. I_c vs V_{GE}
 $V_{CE} = 20V$

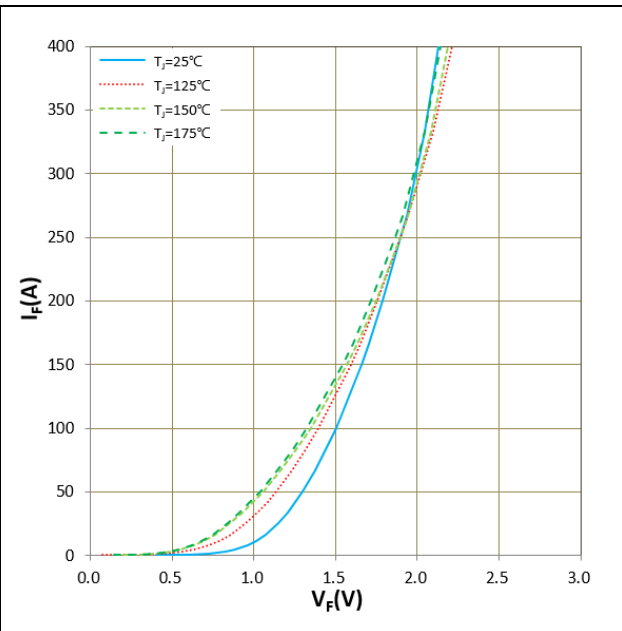


Figure 8. I_f vs V_F

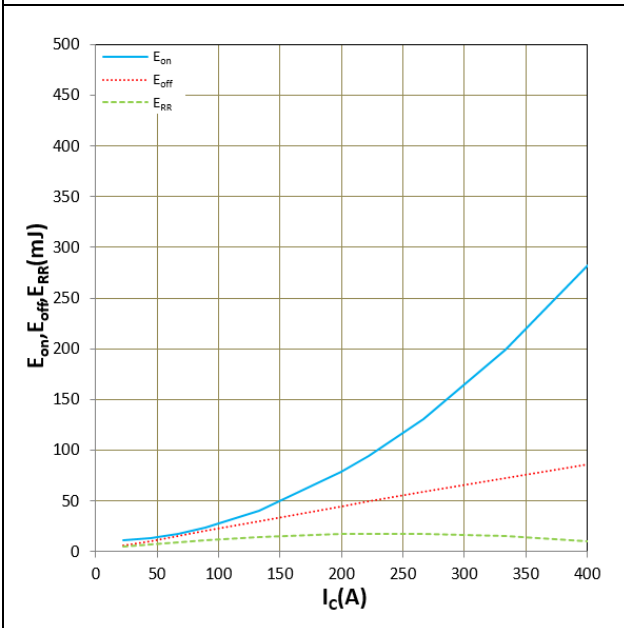


Figure 9. E_{on} , E_{off} , E_{RR} vs I_c (Typ)
 $V_{CC} = 900V$, $V_{GE} = +15V/-8V$, $R_g = 3.0\Omega$, $T_j = 25^\circ C$
Inductive Load

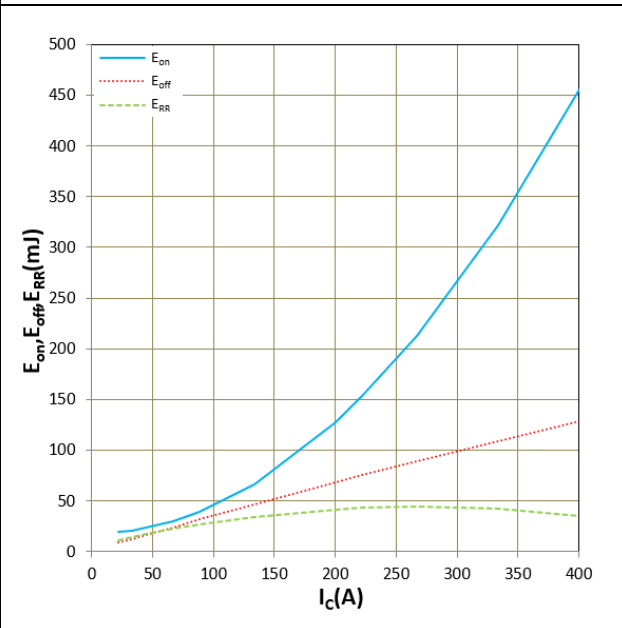


Figure 10. E_{on} , E_{off} , E_{RR} vs I_c (Typ)
 $V_{CC} = 900V$, $V_{GE} = +15V/-8V$, $R_g = 3.0\Omega$, $T_j = 150^\circ C$
Inductive Load

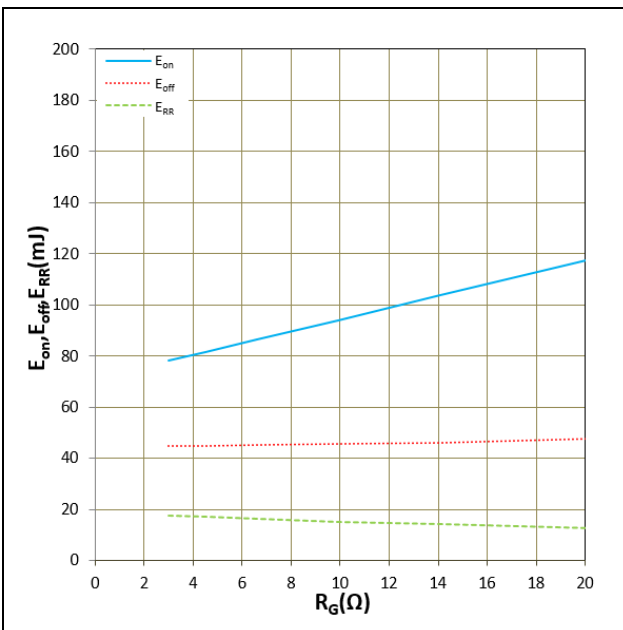


Figure 11. E_{on} , E_{off} , E_{rr} vs R_g (Typ)
 $V_{CC}=900V$, $V_{GE}=+15V/-8V$, $I_C=200A$, $T_j=25^\circ C$
 Inductive Load

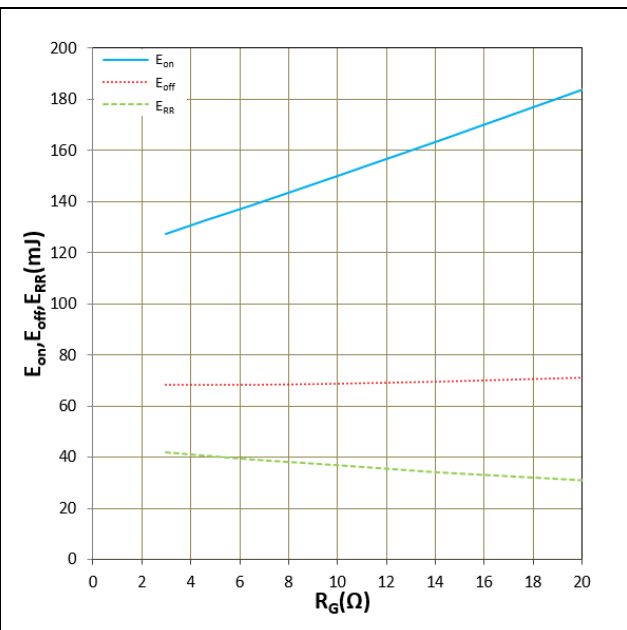


Figure 12. E_{on} , E_{off} , E_{rr} vs R_g (Typ)
 $V_{CC}=900V$, $V_{GE}=+15V/-8V$, $I_C=200A$, $T_j=150^\circ C$
 Inductive Load

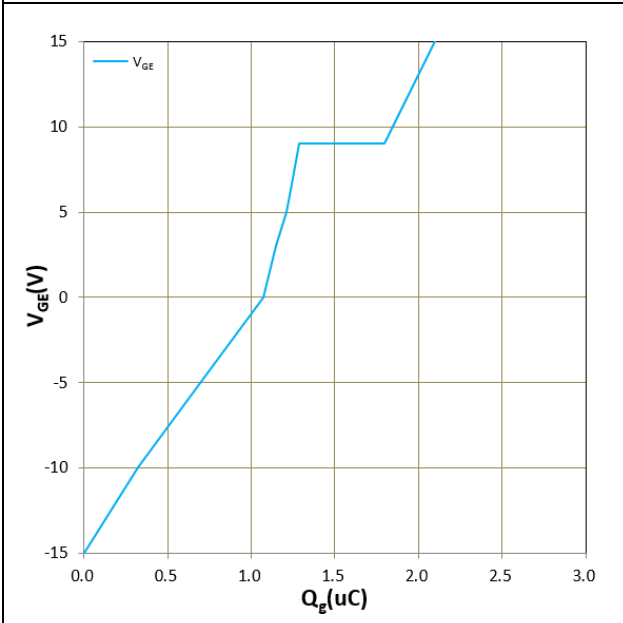


Figure 13. Gate charge

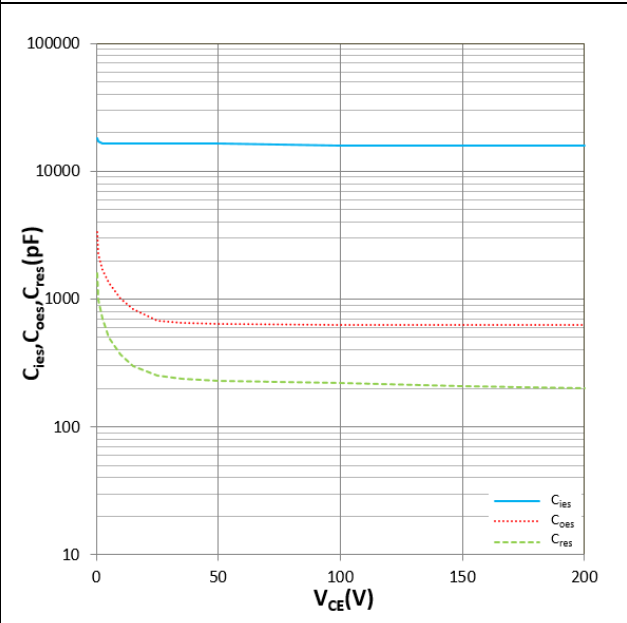


Figure 14. C_{ies} , C_{oes} , C_{res} vs V_{CE}
 $T_j=25^\circ C$, $f=1MHz$

IMPORTANT NOTICE:

This product data sheet describes the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively under the terms and conditions of the supply agreement. There will be no guarantee or of any kind for the product and its characteristics.

The data contained in this document is exclusively intended for technically trained staff. You and your technical departments will have to evaluate the product's suitability for the intended application and the completeness of the product data concerning such application.

Due to technical requirements, our product may contain dangerous substances. For information on the types in question, please contact the sales staff responsible for you.

Changes to this product data sheet are reserved.

Please contact the sales staff (Sales@leapers-power.com) for further information on the product, technology, delivery terms, conditions and prices.